



CONNECTION

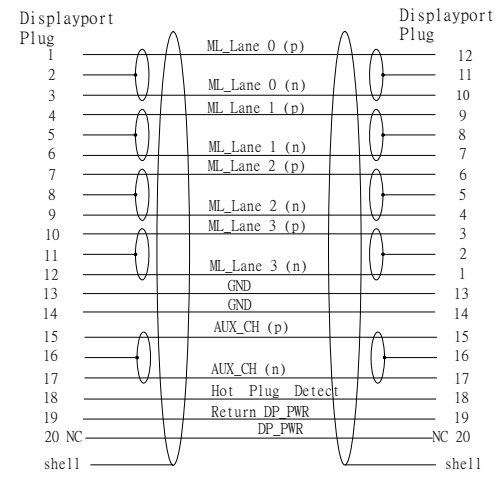

HANK SIZE

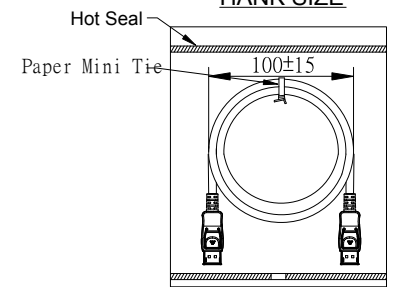

Packing: 1PC / PE Bag

ELECTRIC TESTING

NO	PARAMTER	TEST CONDITIONS
1	Open&Short	100 %
2	Insulation Resistance	≥ 10MΩ
3	Conductor Resistance	≤ 3Ω
4	Voltage	300V DC / 0.1s
5	Functional testing	4K 60HZ

⑤	307191101B*B	Cable Spec.:{[(7/0.08Tc+Foamed-PE)*1P+7/0.08Tc+AL/Mylar]*5+(7/0.08Tc+PP)*4C+Cotton+AL+16/8/0.10Tc}*1C OD=5.5mm Jacket=Black ABS(Non-migration) Jacket with White Text:DisplayPort TM(LOGO) Cable E81280-D UL(Logo) AWM STYLE 20276 80°C 30V VW-1 RoHS	CTI P/N: C15S0492
④	2312110031	DisplayPort Plug Cap - Transparent	
③	31401011050	Black PVC 50P	YT-4530
②	312010384 312020384	Displayport Cover - Black ABS	
①	303380015N03	DisplayPort Plug - Nickel Plated	
ITEM	SAP NO	SPECIFICATION	MODEL



**華大電子股份有限公司**  
**WALTA ELECTRONIC CO.,LTD.**  
 TEL:886-2-26577778;FAX.886-2-26575659

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差		CHECKED 審核		DESIGNED 設計		TITLE 產品名稱	
X. ±1				zhijun 2024/7/10		DP/M to DP/M Cable 32# Black	
.X ±0.50		APPROVED 承認		DRAWN 製圖		SCALE 比例	
.XX ±0.30				zhijun 2024/7/10		1/1	
ANG. ±5°0'						PART NO. 產品料號	
						D01-W129-00001	
						DOC. NO. 文件編號	
						CUT-W129-XXX	
						REV. 版本	
						A	