

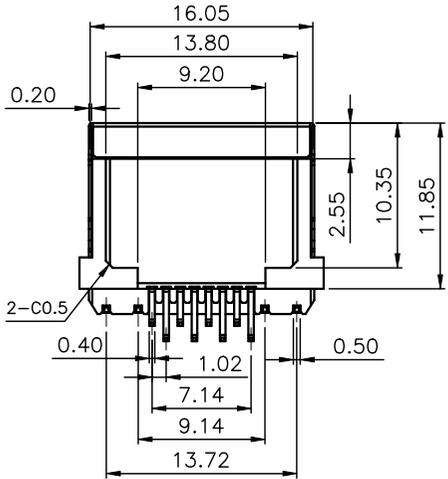
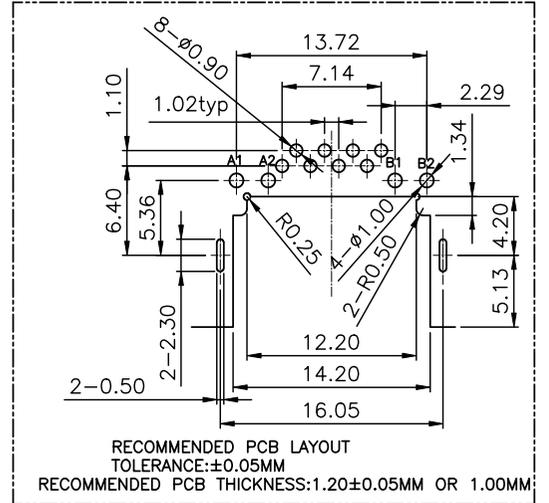

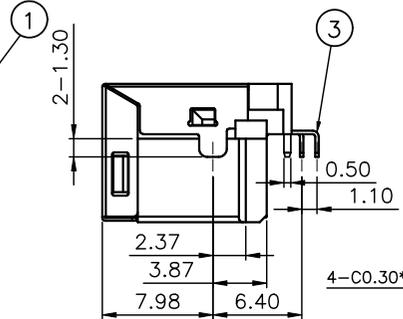

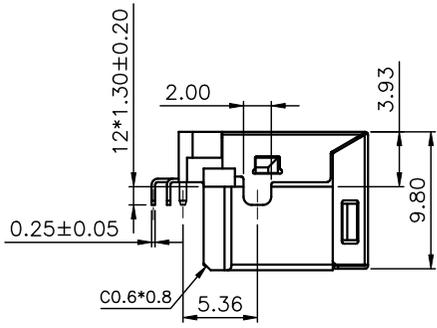


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	HIGH TEMP, THERMAL PLASTIC GLASS FIBER FILLED,UL94V-0	(Black)
2	SHELL	1	STAINLESS	Nickel:50u" Min
3	CONTACT	8	COPPER ALLOY	Gold:30u"Min;Tin:80u"Min;Ni:50u"Min
4	LED PLATED	2	COPPER ALLOY	Tin:100u"Min;Ni:50u"Min

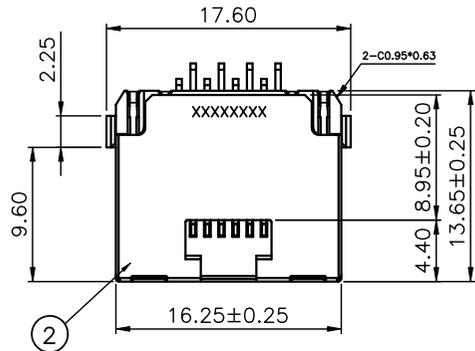

LED ELECTRICAL CHARACTERISTIC			
NODE	COLOR		
A1(-) A2(+)	WHITE	A1 ↔ A2	
B1(-) B2(+)	AMBER	B1 ↔ B2	

**SPECIFICATION**  
**MATERIAL**  
 See drawing  
**STANDARD DATA**  
 Rating current:1.5A  
**ELECTRICAL**  
 Insulator resistance: 500M ohms Min. @ 500 VDC  
 Withstanding voltage: 1000 VAC / minute  
 Contact resistance: 50 m ohms  
**MECHANICAL**  
 Mating force:22.5N(2.3kgf) Max.  
 Unmating force : 80N(8.2kgf)Min.  
 Durability: 5000 cycles Min.  
 Contact retention force: 4.2N(0.43kgf) Min  
 G 0 2 - 0804 - 08 004

SERIES \_\_\_\_\_ MODEL NO. \_\_\_\_\_ TYPE NO. \_\_\_\_\_  
 G=special connector 004=Type 4  
 TYPE \_\_\_\_\_ CONTACT NUMBER \_\_\_\_\_  
 0=other type 08=8 position  
 CONTACT TYPE \_\_\_\_\_  
 2=Through hole type



UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計	TITLE 產品名稱
X. ±0.50		XJQ	RJ45 Modular Jack With LED
.X ±0.25		2012/11/28	CH=0.97mm DIP Type
.XX ±0.15	APPROVED 承認	DRAWN 製圖	PART NO. 產品料號
.XXX ±0.10		XJQ	G02-0804-0800X
ANG. ±2'00"		2012/11/28	DOC. NO. 文件編號
			CUT-0804-004
			REV. 版本
			A

