NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY
3	SHELL	C2680	T=0.30	Ni:80U"	1
2	TERMINAL	C5191	T=0.25	Sn:100U"; Au:30U"	4
1	HOUSING	PBT	—	ORANGE (UL94-V0)	1

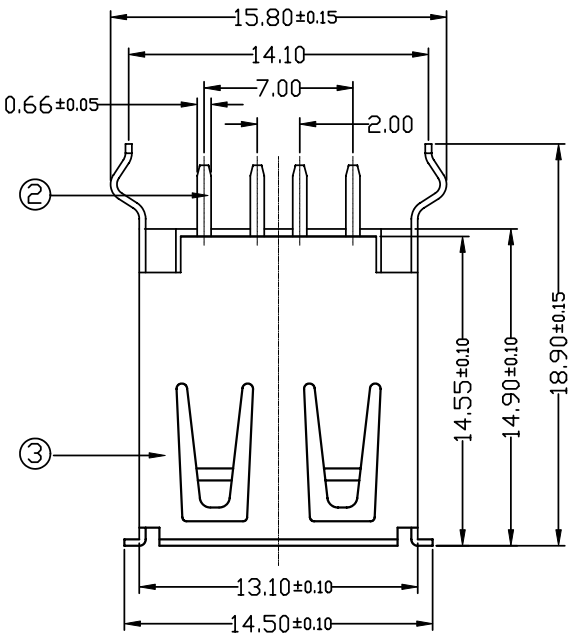

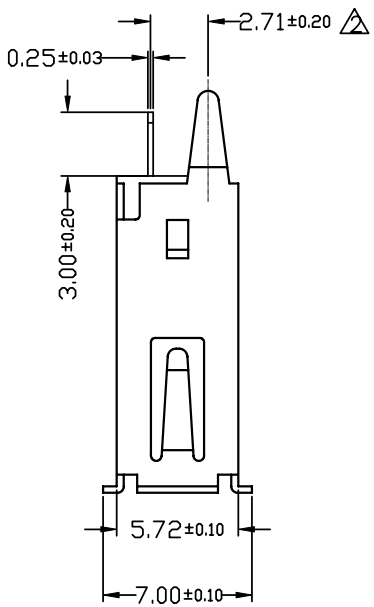

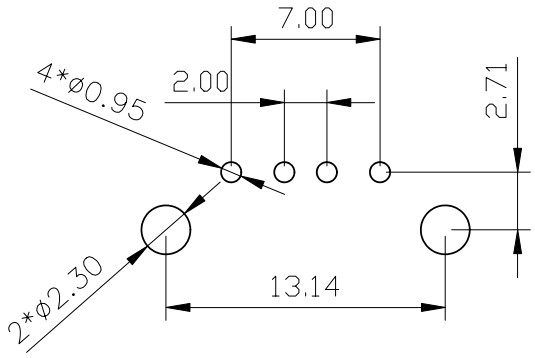

PCB LAYOUT
(TOLERANCE: ±0.05mm)

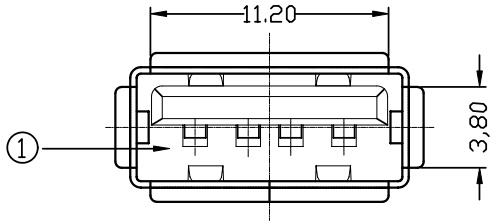

SPECIFCATIONS:
Ratingcurrent:(1.4PIN)2.5Amperes.(2.3PIN)1.5Amperes.
DIELECTRIC Withstanding Voltage:AC 500V.
Insulation resistance:1000MΩ Minimum.
Contact Resistance:30mΩ Maximum.
operating Temperature:-55℃ to +85℃.
MECHANICAL CHARACTERISTICS:
Mating Force:3.5Kg.Maximum.
Unmating Force:1kg.MInimum.
durability:1500 cycles.
Major DIM:△
PART NO.

U 18 - C 025 - 004 07

SERIES
USB Connector
CONN TYPE NO.
18=type 18
FORM OF FACTORY
C=Connector of factory
TYPE NO.
07=Type 07
CONTACT NUMBER
004=04 position
FACTORY CODE

Pb Process Capable RoHS Compliant

WALTA

華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX.886-2-26575659

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
B	E1802-001	△2 X 1	修改鐵殼腳中心尺寸公差	TANG	2018/2/1
A	E1702-001	△1 X 0	-	Lonlon	2017/2/7

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±5°00'

CHECKED 審核
APPROVED 承認
DESIGNED 設計 Lonlon 2017/2/7
DRAWN 製圖 Lonlon 2017/2/7

UNIT 單位 MM
SCALE 比例 1/1
SIZE 尺寸 A4

TITLE 產品名稱: USB 4PIN-AF-180度插板全包式
PART NO. 產品料號: U18-C025-00407
REV. 版本: B
DOC. NO. 文件編號: CUT-C025-083