

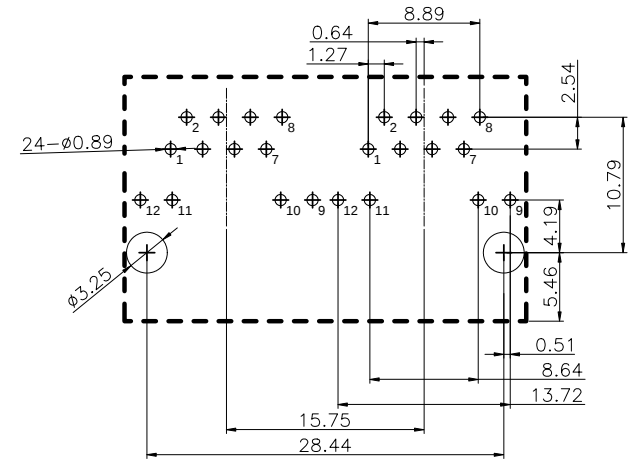
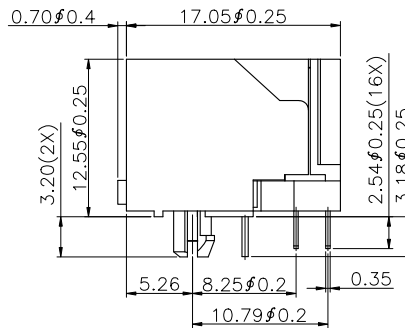
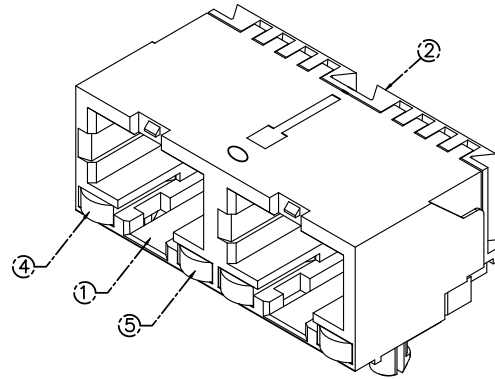
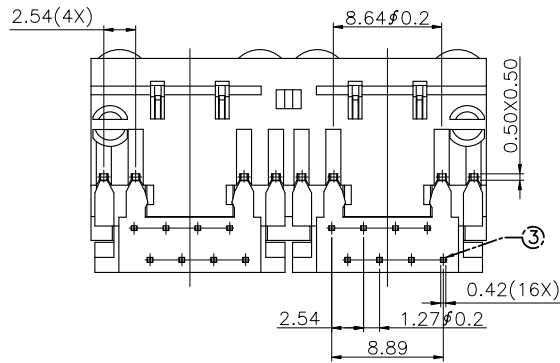
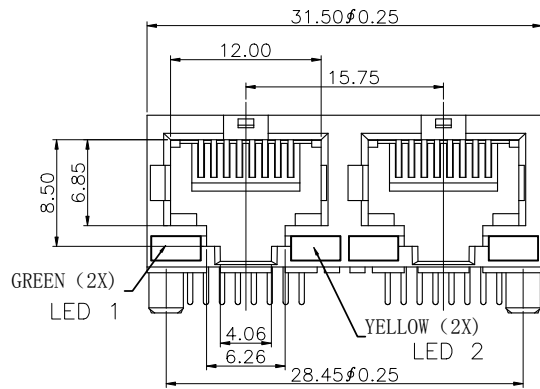


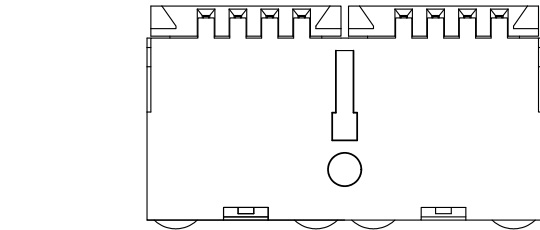

SUGGESTED PCB LAYOUT
DIMENSIONAL TOLERANCE: .XX ±0.08

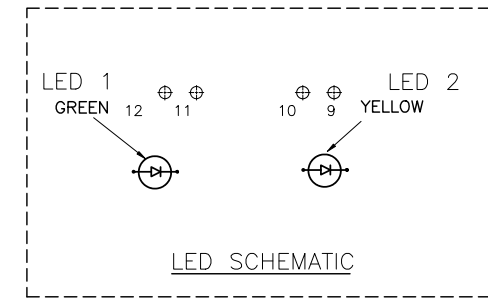

1. OPERATING TEMPERATURE: -40°C~+85°C
2. DURABILITY: 750 MATING CYCLED MIN.
3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

PART NO.

SERIES G 0 2 - C097 - 16 001
TYPE 0
CONTACT TYPE 2
MODEL NO. TYPE NO. 001=Type 1
CONTACT NUMBER 16=16 position

5	LED2	1	YELLOW	BRIGHT TIN 100U"MIN
4	LED1	1	GREEN	
3	CONTACT	16	PHOSPHOR COPPER	0/F ON CONTACT AREA:100U"MIN,BRIGHT TIN. SOLDER AREA:50U"MIN,NICKEL UNDERPLATED OVERALL.
2	COVER	2	PBT	UL94 V-0, COLOR:BLACK
1	HOUSING	1	PBT	UL94 V-0, COLOR:BLACK
No.	Part Name	Q'TY	Material	Finish



WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659

DESIGNED 設計 zhijun 2024/7/23	TITLE 產品名稱 RJ45 1X2全塑帶燈左綠右黃
DRAWN 製圖 zhijun 2024/7/23	PART NO. 產品料號 G02-C097-16001
CHECKED 審核	REV. 版本 A
APPROVED 承認	DOC. NO. 文件編號 CUT-C097-XXX
UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差 X. ±0.50 .X ±0.25 .XX ±0.15 .XXX ±0.10 ANG. ±2°00'	SCALE 比例 1/1 SIZE 尺寸 A4

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
A	EXXXX-XXX	△ X 0	-	zhijun	2024/7/23