
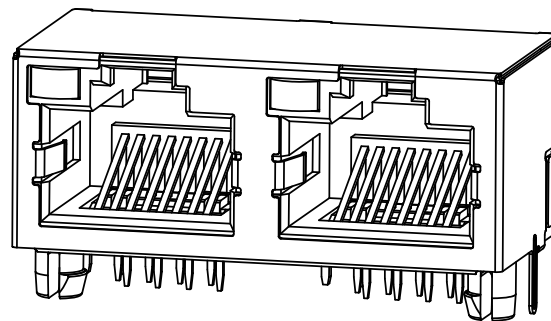
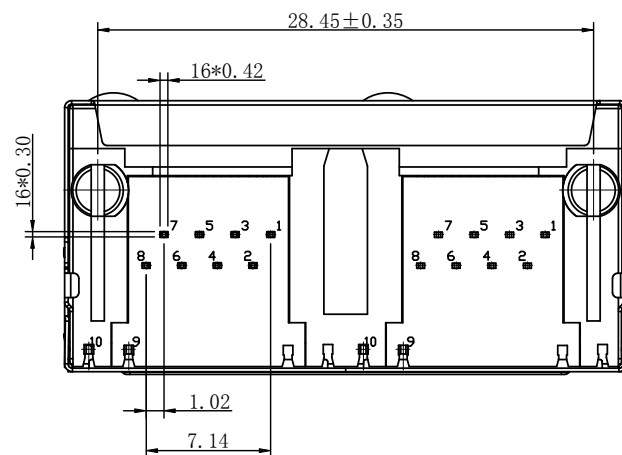
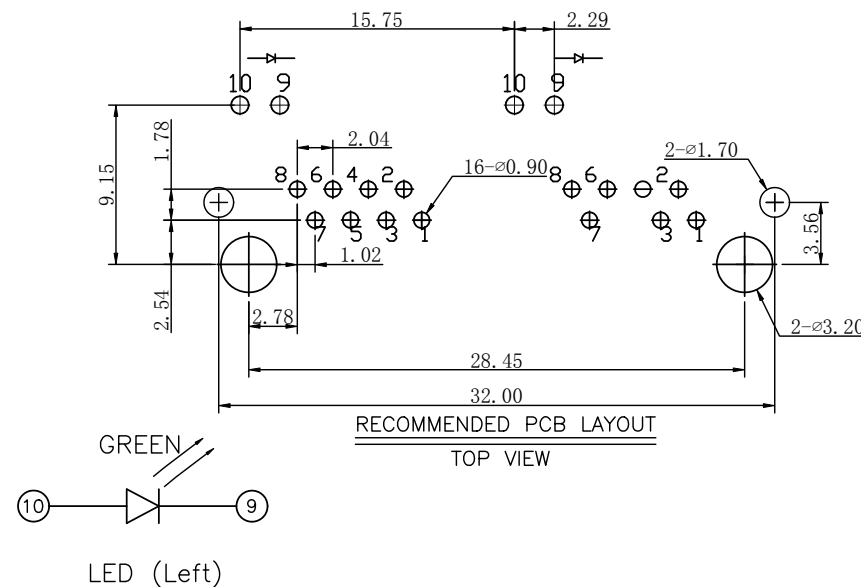
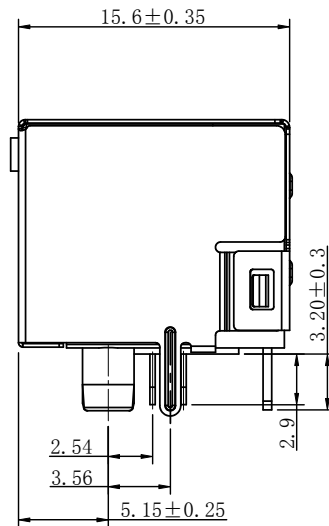


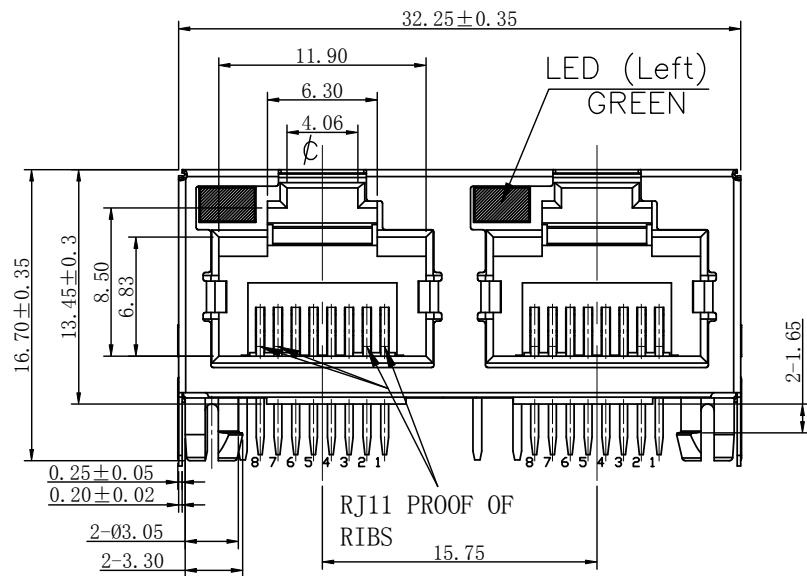


NOTE:

- Material:
 - Housing:Thermopldstic UL94V-0
 - molding:Thermopldstic UL94V-0
 - Contact:C5210
- Finish:
 - Contact: G/F Au plating on contact area, Selective Gold Plating. (see Part No.) 100u"min. Sn(Pb free solder) plating on solder tails area.30u"min. Ni plating all over.
- Electrical Characteristics:
 - Insulation Resistance: 500MW Min.
 - Contact Resistance: 50mW Max.
 - Withstand Voltage: 500VAC 1minute.
 - Current Rating: 1.5A
- DIM. with mark" must be controlled by QC.

PART NO.

SERIES G 0 2 - C097 - 16 002
G=special connector
TYPE 0=other type
CONTACT TYPE 2=Through hole type
MODEL NO. 002=Type 2
CONTACT NUMBER 16=16 position
TYPE NO. 002=Type 2



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659

TITLE		REV.	
產品名稱		版本	
RJ45 1x2PORT全包帶RJ11防呆肋LED左綠		A	
PART NO. G02-C097-16002		DOC. NO. CUT-C097-XXX	
產品料號		文件編號	

DESIGNED		CHECKED		UNLESS OTHERWISE SPECIFIED TOLERANCE	
設計 zhijun		審核		尺寸公差	
2024/7/23		APPROVED		X. ±0.50	
DRAWN		承認		.X ±0.25	
製圖 zhijun		DATE		.XX ±0.15	
2024/7/23		日期		.XXX ±0.10	
ANG. ±2°00'		SIGN		REVISIONS	
		修改		設變內容	