

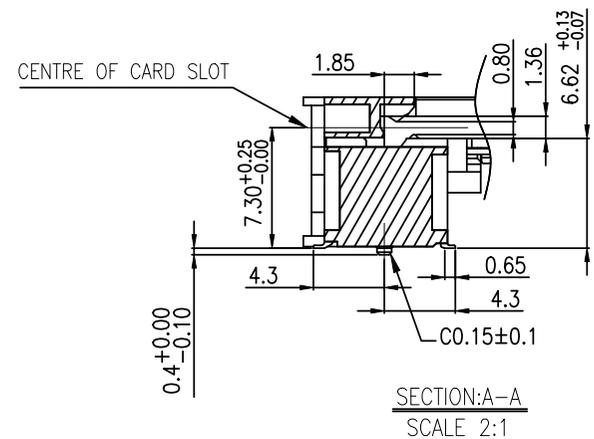
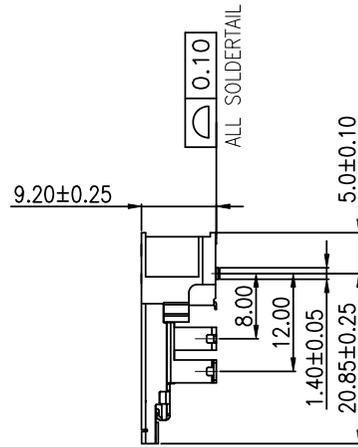



DATE CODE : YYWDLX
 YY: YEAR (09: 2009)
 WW: WEEK (25: THE 25TH WEEK)
 D: DAY (1~7: SUNDAY~SATURDAY)
 L: LINE NUMBER OF ASSEMBLY (A: LINE A)
 X: D OR N (D: DAY; N: NIGHT)

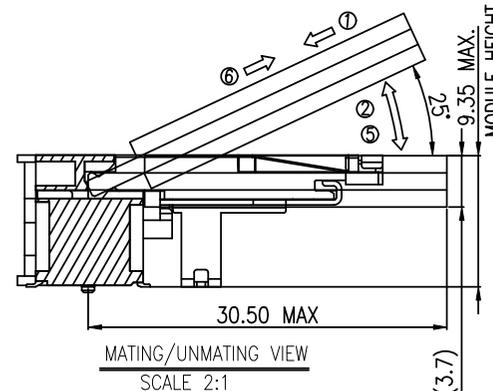

NOTES:
 1.MATERIAL:
 HOUSING: LCP, UL94V-0, Black
 CONTACT: PHOSPHOR BRONZE
 LATCH: STAINLESS
 2.FINISH:
 CONTACT:
 CONTACT AREA: G/F GOLD PLATED
 SOLDER AREA: G/F GOLD PLATED
 UNDER PLATING: NICKEL PLATED.
 LATCH:
 SOLDER AREA: G/F GOLD PLATED
 UNDER PLATING: NICKEL PLATED.
 3.SPECIFICATION:
 CURRENT RATING: 0.5A / (1PIN)
 VOLTAGE RATING: 25V AC
 DIELECTRIC WITHSTANDING: 125V AC FOR 1 MINUTE
 CONTACT RESISTANCE: 60mΩ Max.
 INSULATION RESISTANCE: 500MΩ Min
 OPERATING TEMPERATURE: -40°C to +85°C
 DURABILITY: 25 CYCLES MIN.

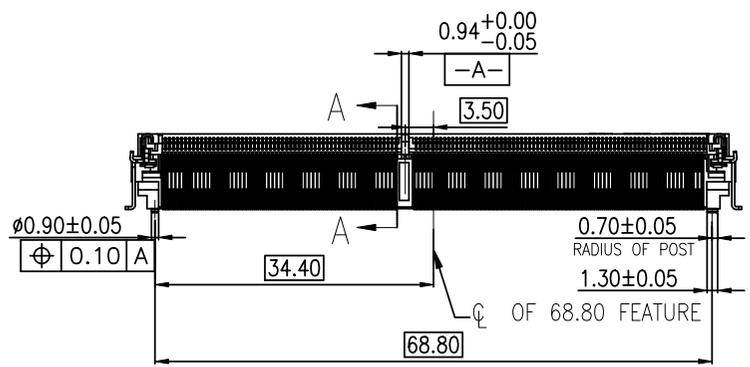





MATING: ① INSERTING(30°) → ② ROTATING → ③ FIXED
 UNMATING: ④ UNFIXED → ⑤ ROTATING → ⑥ WITHDRAWING



WALTA 華大電子股份有限公司
 WALTA ELECTRONIC CO.,LTD.
 TEL:886-2-26577778;FAX:886-2-26575659

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差		CHECKED 審核	DESIGNED 設計	TITLE 產品名稱	
X. ±0.50			Lonlon	SO DIMM DDR4 R/A 260 Pin	
.X ±0.30			2022/9/05	Standard Type H:9.2mm	
.XX ±0.20		APPROVED 承認	DRAWN 製圖	UNIT 單位	PART NO. 產品料號
ANG. ±5°0'			Lonlon	MM	M30-C088-00004
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
A	EXXXX-00X	△ X 0	-	Lonlon	2022/9/05
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

SHEET
頁碼 1/3
REV.
版本 A

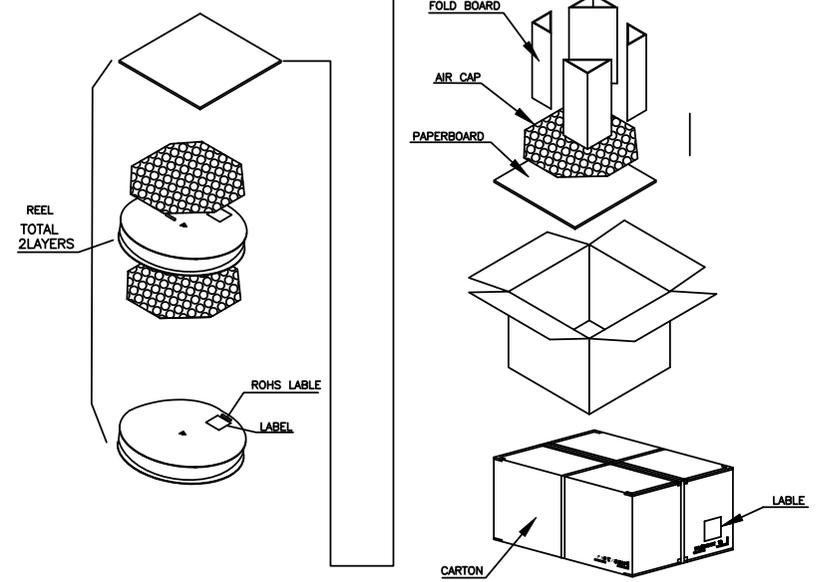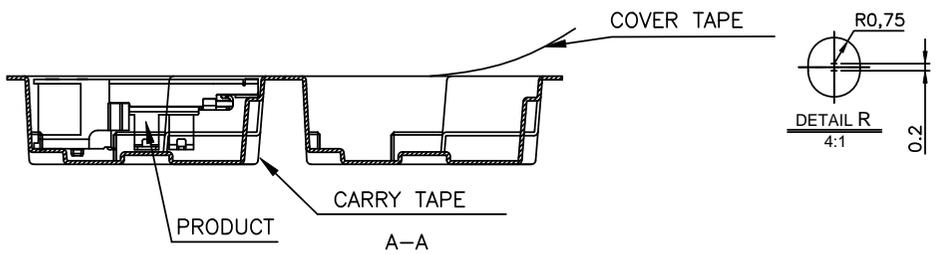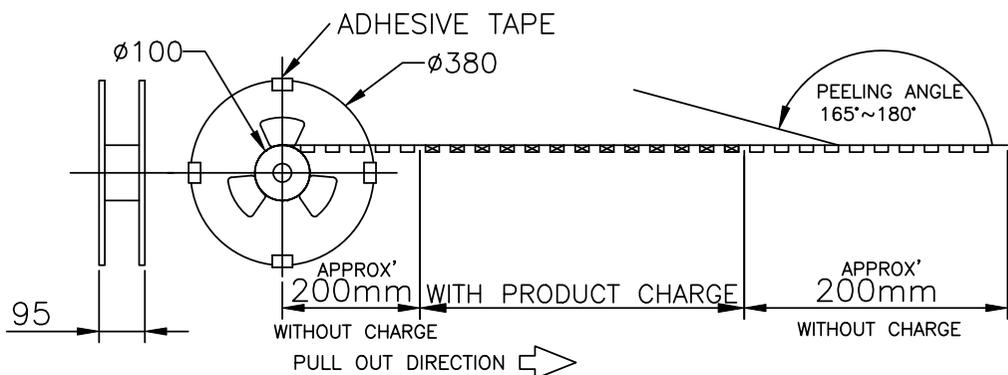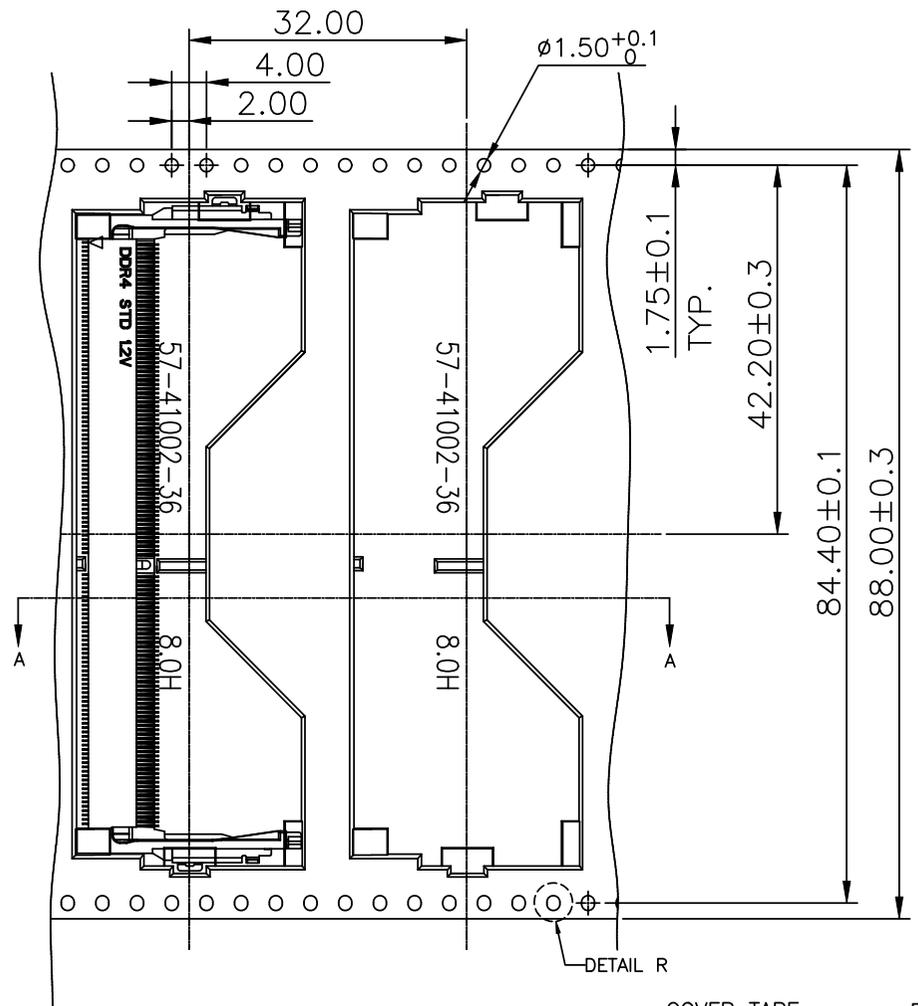

華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
A	EXXXX-00X	△ X 0		Lonlon	2022/9/05

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計
X. ±0.50		Lonlon
.X ±0.30		2022/9/05
.XX ±0.20	APPROVED 承認	DRAWN 製圖
ANG. ±5°00'		Lonlon
		2022/9/05

UNIT 單位	TITLE 產品名稱
MM	SO DIMM DDR4 R/A 260 Pin Standard Type H:9.2mm
SCALE 比例	PART NO. 產品料號
1/1	M30-C088-00004
SIZE 尺寸	DOC. NO. 文件編號
A4	CUT-C088-00X

SHEET 頁碼	REV. 版本
3/3	A