

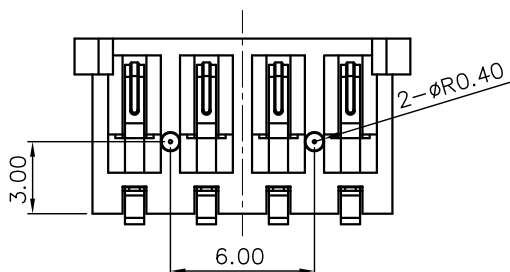
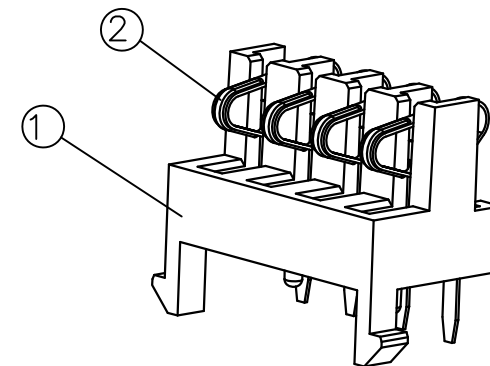
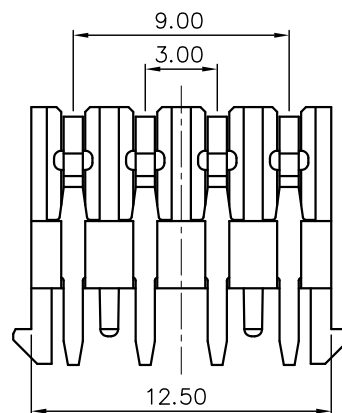
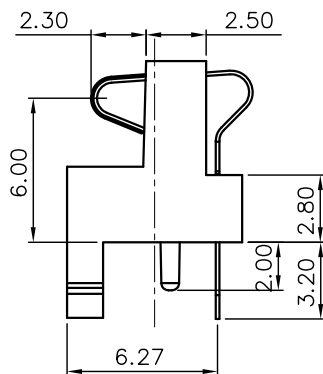


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	P.B.T	BLACK
2	CONTACT	4	BE-CU	8u"Gold on contact area Gold area: 1~3u" base Nickel: 50u"Min.

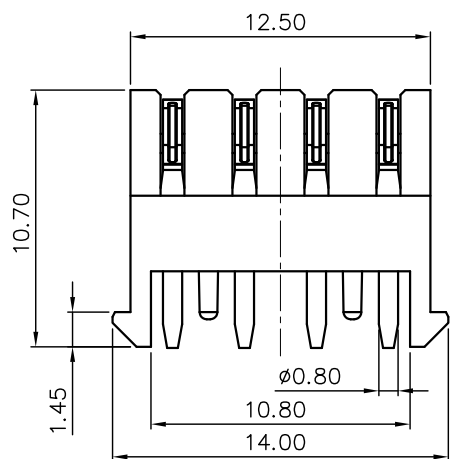

NOTES

- MATERIAL: See drawing
- ELECTRICAL
 - Insulator resistance: 1000M ohms Min. @ 250 VDC
 - Withstanding voltage: 300 VAC / minute
 - Contact resistance: 50m ohms Max.
- MECHANICAL
 - Durability: 10000 cycle./tension 140g+/-30g/PIN
- PACKING: 100pcs/Tray (Reference)
- PART NO.
 - M30 - 0738 - 0.001
 - SERIES Connector
 - MODEL NO. 0738
 - TYPE NO. 001=Type 1
 - PROCESS NO. "0"
 - MATERIAL TYPE 0=Semi-finished goods

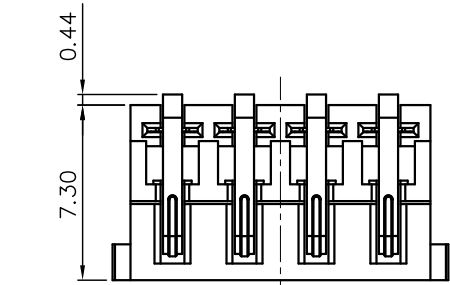

WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL: 886-2-27565688; FAX: 886-2-27673342

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期	UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計	TITLE 產品名稱	UNIT 單位	SCALE 比例	SIZE 尺寸	PART NO. 產品料號	DOC. NO. 文件編號	REV. 版本
A	E0807-012	△ x 0	新開	Kai	07/10/08"	X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5'00"	APPROVED 承認	Kai 07/09/08"	Battery Connector	MM	1/1	A4	M30-0738-00001	CUT-0738-002	A