

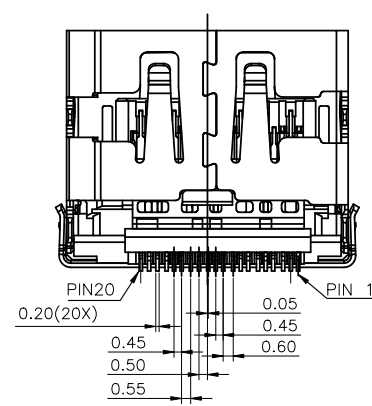
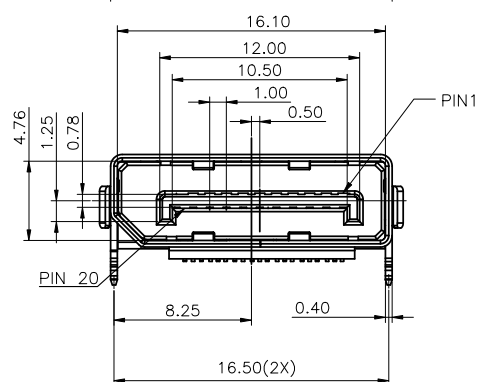
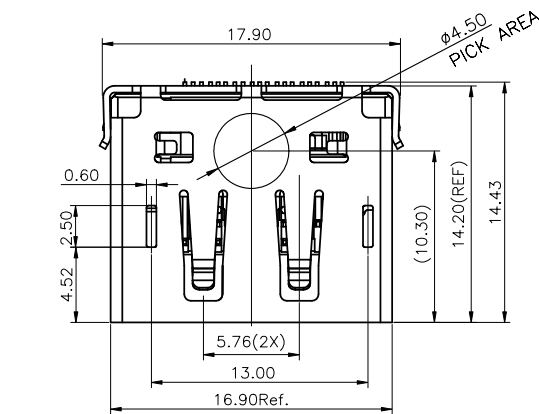




ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP	Black
2	MID PLATE	1	SUS301	NON Plating
3	CONTACT	20	C2680	Gold Flash on contact area, Tin:100u" on solder area under 50u" Nickle
4	SHELL	1	SUS304	Ni:30u"Min

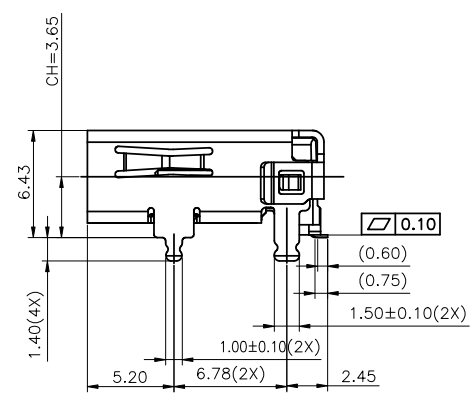

- NOTES:
- ELECTRICAL PERFORMANCE
 - Rated Voltage: 40V
 - Rated Current: 0.5A Max.
 - CONTACT RESISTANCE : 40m OHMS MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE;500V AC(RMS)
 - MECHANICAL PERFORMANCE
 - INSERTION FORCE : 4.5kgf MAX.
 - EXTRACTION FORCE : 1.0~4.0kgf MIN.
 - DURABILITY:10000 CYCLES
 - OPERATING TEMPERATURE:-20°C~+85°C
 - PART NO.

SERIES D 07 - C 124 - 020 01


D=I/O Connector
CONN TYPE NO.
07=type 7
FORM OF FACTORY
C=Connector of factory

TYPE NO.
01=Type 1
CONTACT NUMBER
020=20 position
FACTORY CODE




華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX.886-2-26575659


						UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計 zhijun 2022/8/15		TITLE 產品名稱 DP2.1 UHBR20 SMT RA_CH=3.65mm UNIT 單位 MM SCALE 比例 1/1 SIZE 尺寸 A4									
A	EXXXX-XXX	 X 0	-		zhijun	2022/8/15	APPROVED 承認	DRAWN 製圖 zhijun 2022/8/15		PART NO. 產品料號 D07-C124-02001	REV. 版本 A								
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容			SIGN 修改	DATE 日期												
1		2		3		4		5		6		7		8		9		10	

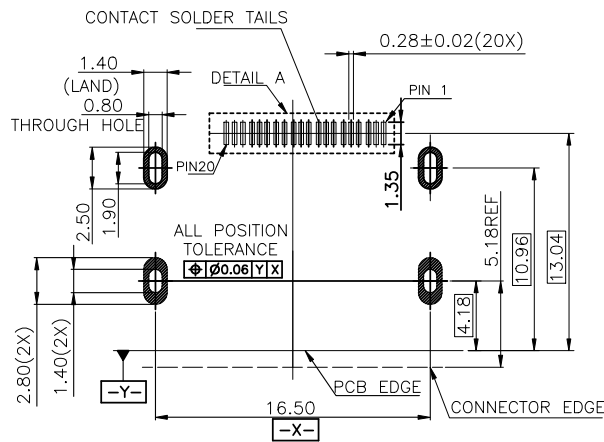

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE VIEW)
PCB THICKNESS: 1.6mm TOLERANCE: ±0.05

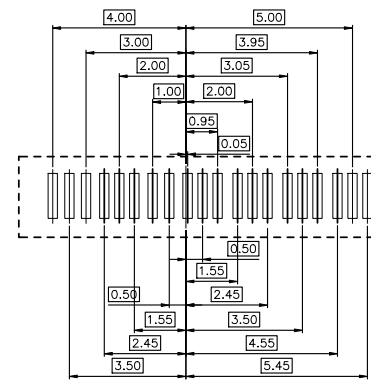


SCALE 2:1
DETAIL A

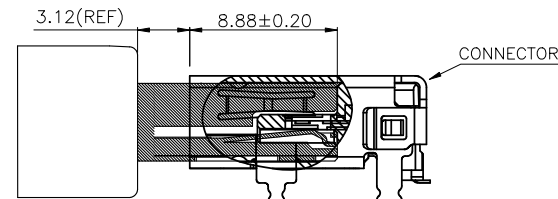

RECOMMENDED METHOD OF MATE
SCALE 1:1

Displayport Connector Pin Assignment		
PIN No.	Signal Type	Pin Name
1	In/Out	ML_Lane3 (n) / ML_Lane0 (p)
2	GND	GND
3	In/Out	ML_Lane3 (p) / ML_Lane0 (n)
4	In/Out	ML_Lane2 (n) / ML_Lane1 (p)
5	GND	GND
6	In/Out	ML_Lane2 (p) / ML_Lane1 (n)
7	In/Out	ML_Lane1 (n) / ML_Lane2 (p)
8	GND	GND
9	In/Out	ML_Lane1 (p) / ML_Lane2 (n)
10	In/Out	ML_Lane0 (n) / ML_Lane3 (p)
11	GND	GND
12	In/Out	ML_Lane0 (p) / ML_Lane3 (n)
13	CONFIG (see note)	CONFIG 1
14	CONFIG (see note)	CONFIG 2
15	I/O	AUX CH (p)
16	GND	GND
17	I/O	AUX CH (n)
18	Out/In	Hot Plug Detect
19	RTN	Return
20	Power Out/PWR Out (see note2)	DP_ PWR






華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX.886-2-26575659




TITLE		REV.	
產品名稱		版本	
DP2.1 UHBR20 SMT RA_CH=3.65mm		2/3	
PART NO.		REV.	
產品料號		D07-C124-02001	
DOC. NO.		A	
文件編號		CUT-C124-010	

REVISIONS		SIGN		DATE	
修改內容		修改		日期	
zhijun		2022/8/15			
A		EXXXX-XXX		△ X 0	
REV.		ECN NO.		MARK	
版本		設變號碼		記號	

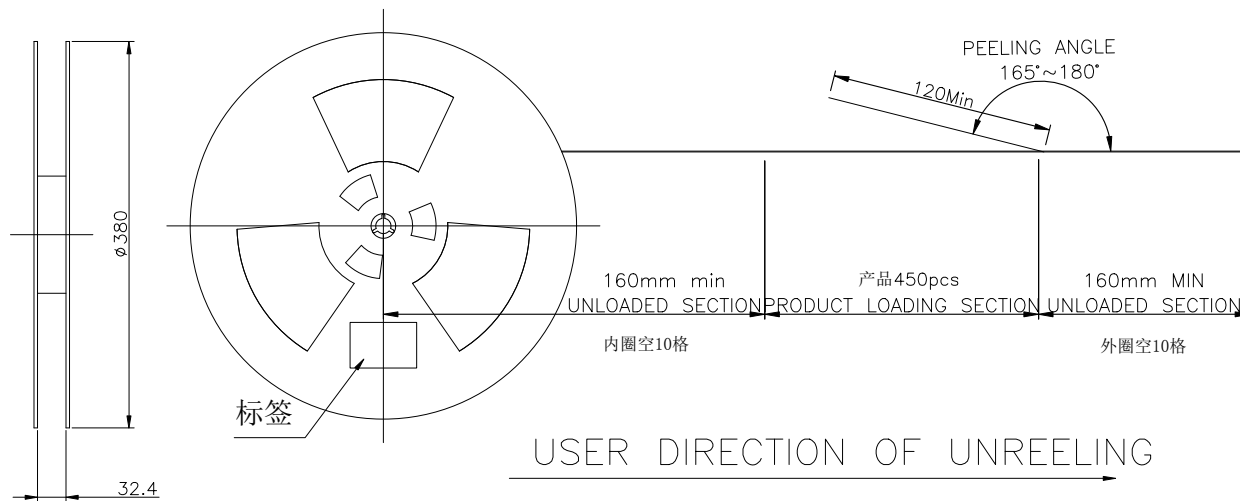


USER DIRECTION OF UNREELING



卷帶拉出方向

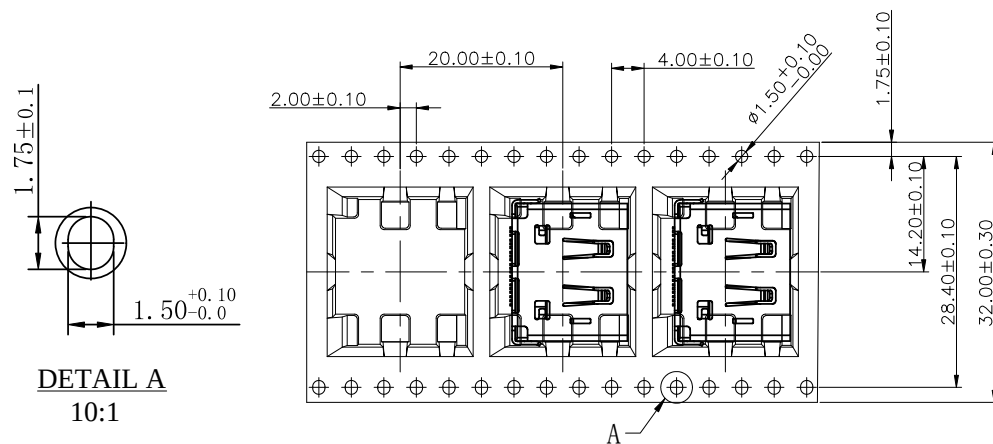

标签




FOLDING BOARD

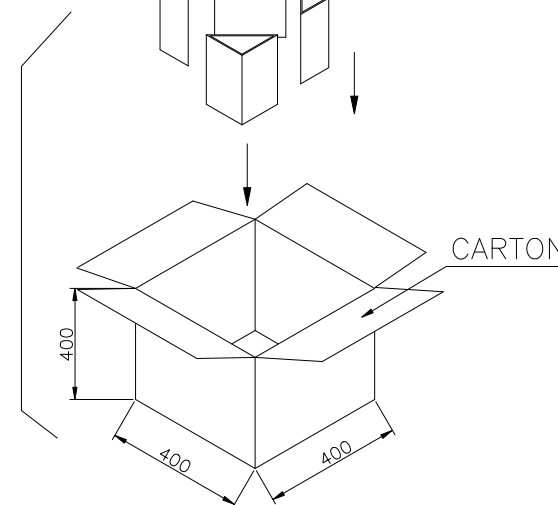

CARTON

450	10	4500 PCS	--KG	--KG
PCS/REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659

TITLE 產品名稱	DP2.1 UHBR20 SMT RA_CH=3.65mm	3/3
UNIT 單位	MM	
SCALE 比例	1/1	
PART NO. 產品料號	D07-C124-02001	
DOC. NO. 文件編號	CUT-C124-010	
REV. 版本	A	

REVISIONS 設變內容	SIGN 修改	DATE 日期	2022/8/15	zhijun	2022/8/15	UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計	zhijun 2022/8/15	DRAWN 製圖	zhijun 2022/8/15	REV. 版本	A
ECN NO. 設變號碼	MARK 記號	EXXXX-XXX	A	X 0	-	X. ±0.50	APPROVED 承認						